






# SR FOR FPC APPLICATION

## FPC 產品特色 (Feature)

- 優異的PI密著性。(Excellent PI adhesion)
- 優異的彎曲耐性。(Excellent bendability )(FT43C, TTR25036)
- 低曝光能量。(Low exposure energy)
- 優良的ENEPIG耐性。(Good ENEPIG resistance)(TTR25014)

### Bendability

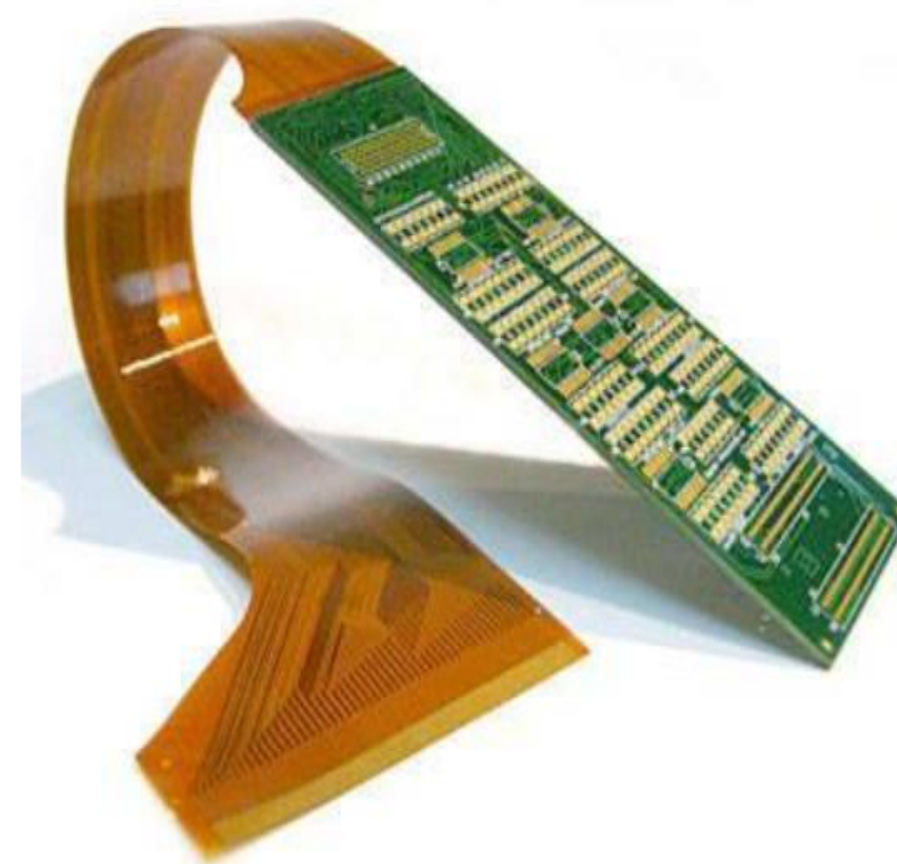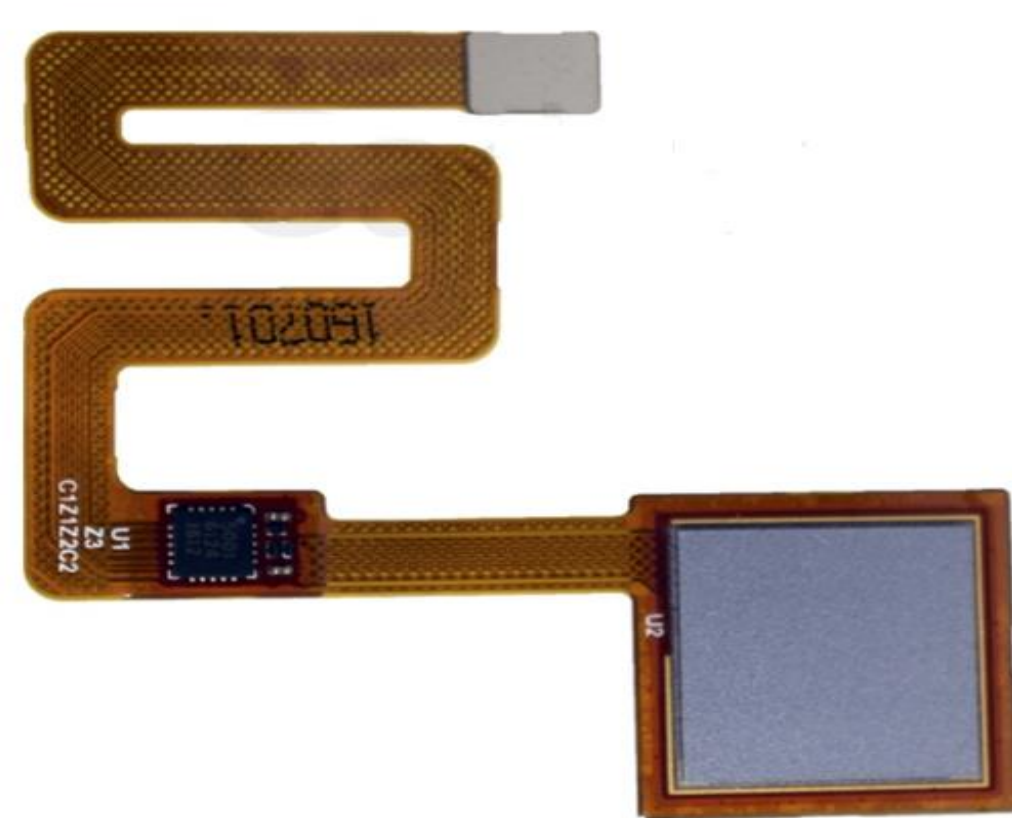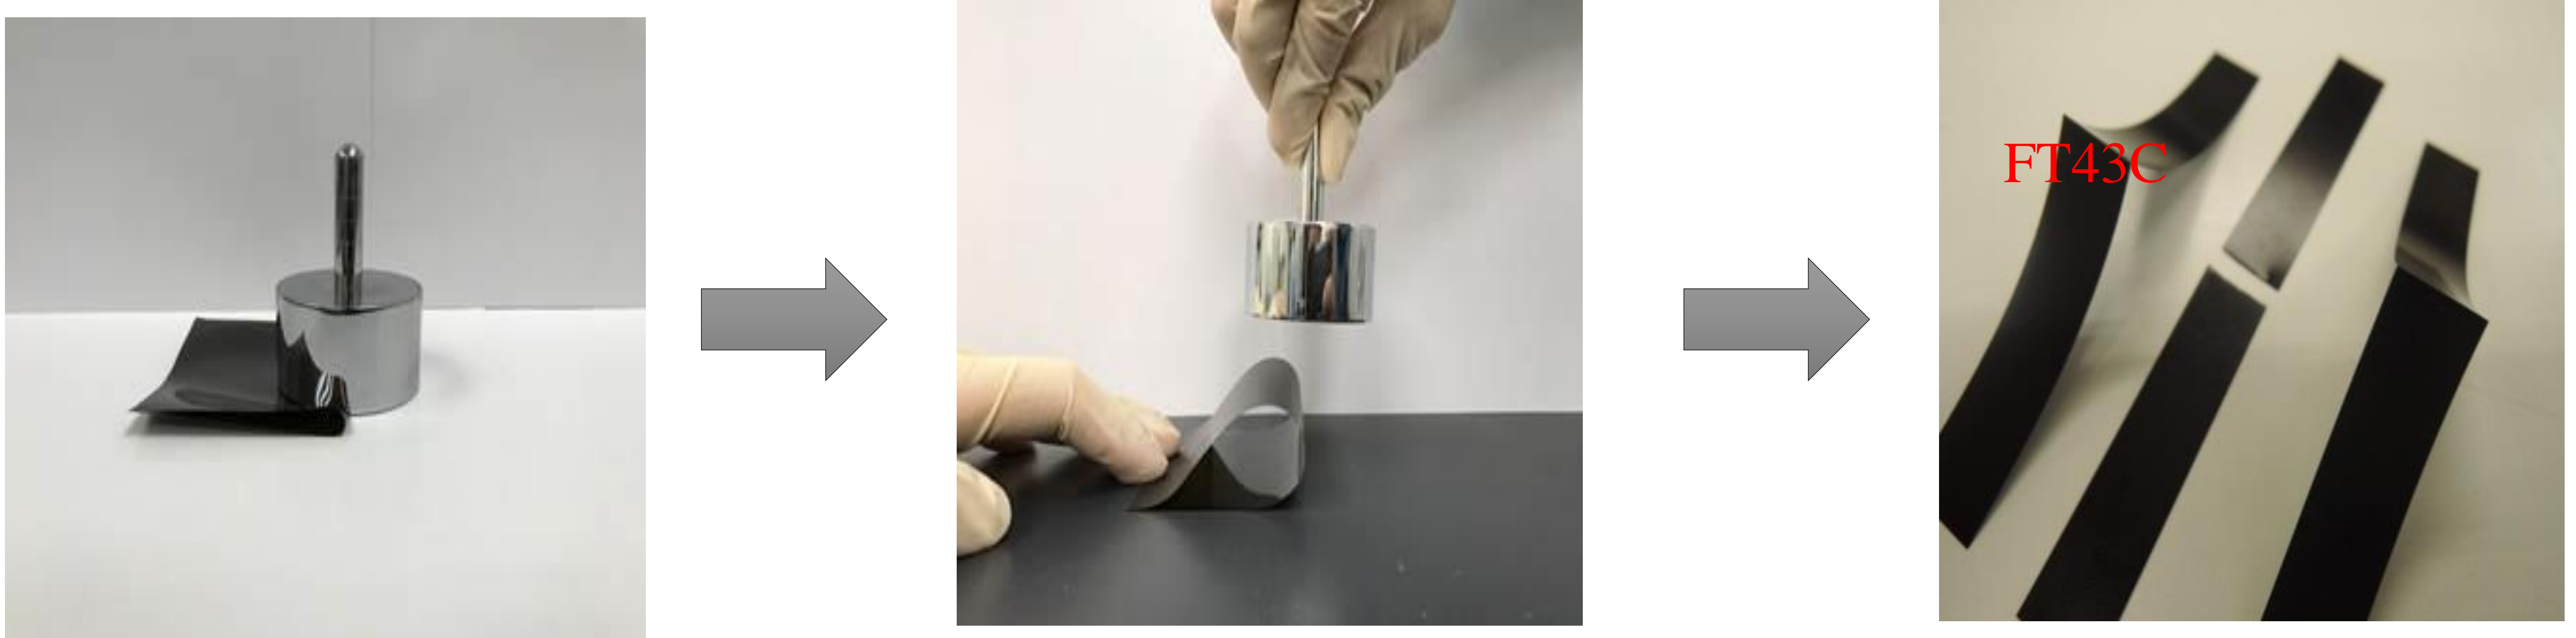

PSR-9000 Series	FT01M	FT50MD	FT43C	TTR25014	TTR25005
UL	94V0	94V0	94V0	94V0	94V0
Exposure energy	500 mj/cm2	60 mj/cm2	60 mj/cm2	200 mj/cm2	100 mj/cm2
ENEPIG(Ni :3~6um)	○	○	○	◎	○
Adhesion (PI)	Pass	Pass	Pass	Pass	Pass
Bendability (500g)	13 times	15 times	>40 times	29 times	17 times
Gloss (GU)	9~12	19~23	36~40	13~16	2~8
Solder Resistance	260.C /10s	260.C /10s	260.C /10s	260.C /10s	288.C /10s

特性評比: ◎>○